




**ZetaLube**


A New Lubricity Dimension  
Evolved From Experience

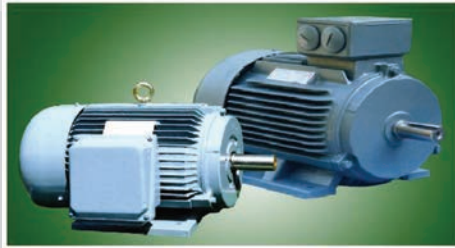

# ZetaLube 206 Moly Grease

## Description

ZetaLube 206 is a versatile grease formulated with synthetic fluid and additives including molybdenum disulphide suitable for application on electric motors and all types of bearings. In particular, it is recommended for bearings operating at medium to high speeds due to its unique properties of low friction coefficient and excellent load-carrying capability.

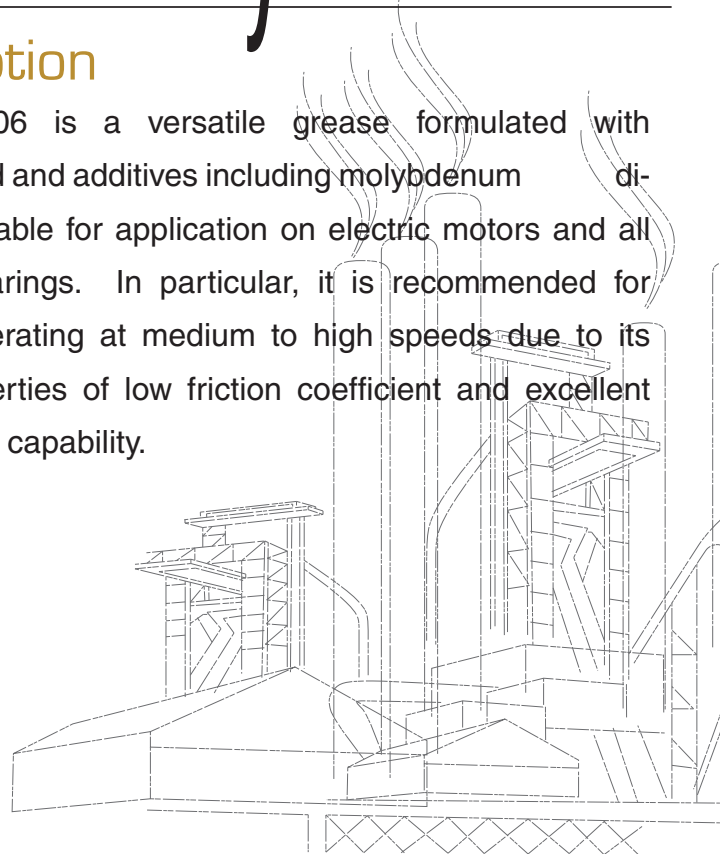

**MAGNA INDUSTRIAL CO. LIMITED**  
Total Quality Maintenance

[www.magnagroup.com](http://www.magnagroup.com)

Magna Industrial reserves the right to modify or change this product for purpose of improving its performance characteristics ©2007 Magna Industrial Co. Limited .

The ZetaLube trade mark is the property of ITW, Inc. and is used under licence by Magna Industrial Co. Limited



## Features and Benefits

- Excellent oxidation and thermal stability to protect parts and components against carbon residues build-up.
- Good adhesiveness to prevent “fling-off” of the grease from parts/components.
- Excellent film strength to provide protection against metal-to-metal wear and tear.
- Good protection against corrosion and water wash-off.
- Versatile applications – reduce inventory of lubricants.
- Extends machinery/equipment service life and reduces maintenance costs.

## Recommended Applications

- Can be applied on plain, roller, anti-friction, & ball bearings, rack & pinion, slides, universal joints, guides frequently exposed to water, steam, and high temperatures.
- Particularly suitable for use as general purpose grease for the processing department of textile plants.

## Typical Data

| TEST                  | ASTM TEST METHOD | TEST RESULT  |
|-----------------------|------------------|--------------|
| Appearance            | Visual           | Yellow       |
| NLGI Grade            | D-217            | 2            |
| Base Fluid:           |                  |              |
| Viscosity, cSt @ 40°C | D-445            | 169.3        |
| @ 100°C               | D-445            | 19.5         |
| Viscosity Index       | D-2270           | 132          |
| Dropping Point, °C    | D-2265           | 260+         |
| Temperature Range, °C | D-128            | -40 to + 210 |

The data shown are typical value and may vary.

## Pack-size

15 Kg Pail

### Authorized Distributor

**Alshawi Trading,**  
Block 351, Road 51, Bldg 20, Manama - Bahrain.  
www.alshawitrading.com  
info@alshawitrading.com  
P.O. Box : 33526

Tel: (973) 1755 0019  
Fax: (973) 1755 5108

**MATERIAL SAFETY DATA SHEET**

May be used to comply with OSHA's Hazard Communication Standard, 29 CFR 1910. 1200, Standard must be consulted for specific requirements.

ZETALUBE DIVISION  
MAGNA INDUSTRIAL CO. LIMITED  
18/F., GUARDIAN HOUSE,  
32 OI KWAN ROAD, WANCHAI,  
HONG KONG

TEL: (852) 2577 5187

FAX: (852) 2577 3190

|  |                                   |
|--|-----------------------------------|
| <b>IDENTITY (As Used on Label and List)</b><br><b>ZETALUBE 206</b> | <b>LAST ASSESSED:</b> 29 May 2007 |
|--|-----------------------------------|

**SECTION I - HAZARDOUS INGREDIENTS/IDENTITY INFORMATION**

| <i>Hazardous Components<br/>(Specific Chemical Identity: Common Name(s))</i> | <i>CAS NO.</i> | <i>ACGIH<br/>TLV</i>   | <i>Other Limits<br/>Recommended</i> |
|--|----------------|------------------------|-------------------------------------|
| Highly refined mineral oil**   | 64742-65-0     | 5.0mg/m <sup>3</sup> * | -                                   |
| Molybdenum disulfide   | 1317-33-5      | 15.0mg/m <sup>3</sup>  | -                                   |

**SECTION II - PHYSICAL CHARACTERISTICS**

|                                |      |  |        |
|--------------------------------|------|--|--------|
| <i>Boiling Point</i>           | N.A. | <i>Specific Gravity (H<sub>2</sub>O = 1)</i> | ~0.9   |
| <i>Vapor Pressure (N.A.)</i>   | N.A. | <i>Melting Point</i>                         | >180°C |
| <i>Vapor Density (AIR = 1)</i> | N.A. | <i>Evaporation Rate (Ether = 1)</i>          | N.A.   |

*Solubility in Water* < 0.1 g/l

*Appearance and Odor* Dark grey/black grease with negligible odor.

**SECTION III - FIRE AND EXPLOSION HAZARD DATA**

| <i>Flash Point (Method Used)</i> | <i>Flammable Limits</i> | <i>LEL</i> | <i>UEL</i> |
|----------------------------------|-------------------------|------------|------------|
| >240°C                           | N.A.                    | -          | -          |

***Extinguishing Media***

Dry chemical, water fog, carbon dioxide, foam, and sand.

***Special Fire Fighting Procedures***

Fire fighters should wear an approved self-contained breathing apparatus.

***Unusual Fire and Explosion Hazards***

None expected. Autoignition temperature is in excess of 450°C.

**SECTION IV - REACTIVITY DATA**

| <i>Stability</i> | <i>Conditions to Avoid</i> |
|------------------|----------------------------|
| Stable           | None                       |

***Incompatibility (Materials to Avoid)***

Strong oxidizing agents

***Hazardous Decomposition or Products***

Oxides of carbon

| <i>Hazardous Polymerization</i> | <i>Condition to Avoid</i> |
|---------------------------------|---------------------------|
| Will Not Occur                  | None                      |

**SECTION V - HEALTH HAZARD DATA**

---

**Threshold Limit Value**

See section I hazardous ingredients

---

**Effects of Overexposure**

There is no lethal dose information available.

Inhalation: Inhalation of vapours can cause irritation of the respiratory tract. High concentrations of oils, mists or vapours can cause chemical pneumonitis.

Skin: May cause irritation, drying and cracking.

Eyes: Cause irritation.

Ingestion: May cause irritation in mouth and stomach, thirst, nausea, vomiting, diarrhoea, with possible collapse if large amounts ingested.

Aspiration of material upon vomiting may cause chemical pneumonitis.

---

**Emergency & First Aid Procedures**

Eyes: Flush with large amounts of water for at least 15 min. Call a physician immediately.

Skin contact: Wash thoroughly with soap and water.

Inhalation: N.A.

If swallowed: Call a physician immediately.

---

**SECTION VI - PRECAUTIONS FOR SAFE HANDLING AND USE**

---

**Steps to Be Taken In Case Material Is Released or Spilt**

Transfer bulk of material into another container. Absorb remaining residue with proper absorbents such as sand, earth, and vermiculite. Sweep up and dispose of as solid waste comply with all local and national regulations.

---

**Waste Disposal Method**

By methods consistent with local and national regulations.

---

**Precautions to Be Taken in Handling and Storing**

Keep containers closed. Avoid contact with skin, eyes and clothing. Wash thoroughly after handling. Wash clothing before re-use. Keep away from feed and food products.

---

**Other Precautions**

Keep out of the reach of children.

---

**SECTION VII - CONTROL MEASURES**

---

**Respiratory Protection (Specify Type)**

None required

| <b>Ventilation</b>                      | <b>Local Exhaust</b>                                  | <b>Special</b> |
|---|---|----------------|
|   | N.A.  | N.A.           |
|   | <b>Mechanical (General)</b>                           | <b>Other</b>   |
|   | N.A.  | N.A.           |
| <b>Protective Gloves</b>                | <b>Eye Protection</b>                                 |                |
| Rubber or plastic oil resistant gloves. | Safety goggles and full-face shield when handled hot. |                |

---

**Other Protective Clothing or Equipment**

None required

---

**Work/Hygienic Practices**

N.A.

---

**Remarks**

\* The ACGIH TLV for mineral oil mists is 5mg/m<sup>3</sup> for a daily 8-hour exposure.  
\*\* Contains less than 3% DMSO extract as measured by IP346.

Transportation: Not classified.

We believe the statements, technical information and recommendations contained herein are reliable, but they are given without warranty or guarantee of any kind, express or implied, and we assume no responsibility or any loss, damage, or expense, direct or consequential, arising out of their use.

---