

JIF-15A Weighing Indicator

Features




- Compact and high efficiency design suitable for any control panels
- Fast 120 times A/D sampling rate, perfect for high speed motion batching control
- Internal 24 bits A/D resolution
- Equipped with RS-485 or RS-232 serial interface for remote display, PC, PLC, and HMI
- All function setups and calibration can be done through the keyboard or RS 232/RS485 Modbus RTU
- Flexible batching modes: insufficient filling, manual and auto discharge, batch loop frequency/weight/accumulations



Specifications

Model	JIF-15A
Built-in Interface	RS 232 (Modbus RTU and ASCII)
Display	Weight display 6 digits, 7 segments 0.56" high red LED
Status Indicators	3 ϕ LED, Final, Sp3, Sp2, Sp1, Z, Band, HI/OK/LO, MD(Stable), Zero, Net, Gross
Min. Readability	$\times 1, \times 2, \times 5, \times 10, \times 20, \times 50$
Load cell excitation	DC 5V \pm 5% , 120mA (up to 8 350 Ω Load Cells)
Memory	Calibration parameters and function settings are saved into EEPROM
Input sensitivity	0.12 μ V/D and up 1/60000 d
Max. measured voltage	-1mV - 39mV
A/D Conversion/rate	$\Delta \Sigma$ / 120 times/sec.

Sizedraft

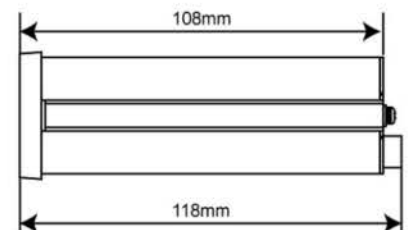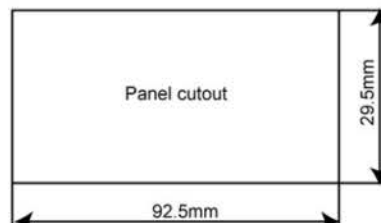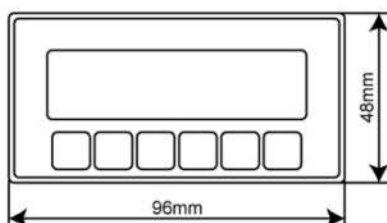

JADEVER[®]



Jadever Scale Co., Ltd.
Tel : 886-2-22990203
Fax : 886-2-22990204
http: www.jadever.com
E-mail:sales@jadever.com.tw

Xiamen Jadever Scale Co., Ltd.
Tel : 86-592-6037668
Fax : 86-592-6037028
http://www.jadever.com
E-mail:xmjadever@jadever.com.cn

Jadever Weigtech, Inc.
Tel:1-905-482-2618
Fax:1-905-887-4066
http://www.jadeverscale.com
E-mail:james@jadeverscale.com



مؤسسة الشاوي التجارية
ALSHAWI TRADING

Alshawi Trading

Block 351, Road 51, Bldg 20, Manama - Bahrain.
www.alshawitrading.com
info@alshawitrading.com
P.O. Box: 33526

Telephone (973) 1755 0019
Fax (973) 1755 5108