

# JIF-15B Weighing Indicator

## Features


- Industrial grade design for tough industrial environments
- Noise and interference protection. Efficiently block the interference of power, microwave
- Standard equipment: Independent RS 232 Current Loop & Data Clock Output interface
- 5 stages of linear calibration, providing higher system accuracy
- 24 bits Internal A/D resolution reaches 24 bits
- Highly stabilized A/D sampling data
- Equipped with Self-Dialogist function, convenient for on-site maintenance



## Specifications

Model	JIF-15B
Built-in Interface	RS 232 & Current Loop & Data Clock Output
Display	Weight display 7 digits, 7 segments 0.8" high red LED
Status Indicators	3 $\phi$ LED, Stable, Zero, Net, Gross, Tart
Min. Readability	$\times 1, \times 2, \times 5, \times 10, \times 20, \times 50$
Load cell excitation	DC 5V $\pm$ 5%, 120mA (up to 8 350 $\Omega$ Load Cells)
Memory	Calibration parameters and function settings are saved into EEPROM
Input sensitivity	0.15 $\mu$ V/D and up 1/60000 d
Max. measured voltage	-1mV - 39mV
A/D Conversion/rate	$\Delta \Sigma$ / 80 times/sec.

## Sizedraft

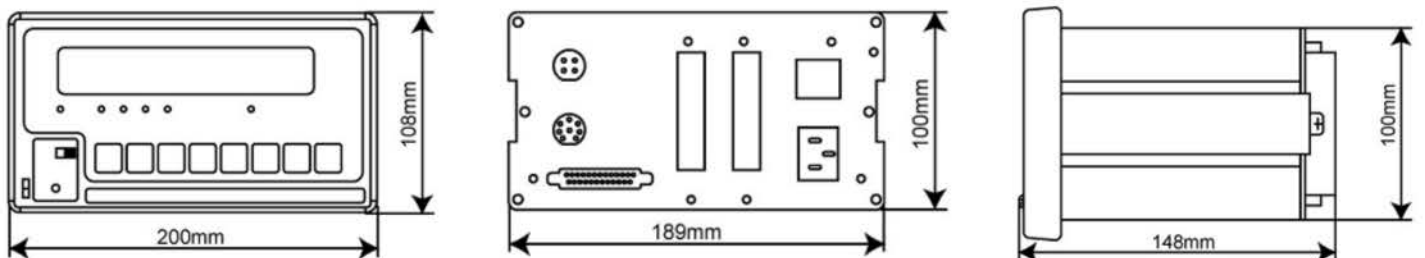

**JADEVER**<sup>®</sup>



Jadever Scale Co., Ltd.  
Tel : 886-2-22990203  
Fax : 886-2-22990204  
http: www.jadever.com  
E-mail:sales@jadever.com.tw

Xiamen Jadever Scale Co., Ltd.  
Tel : 86-592-6037668  
Fax : 86-592-6037028  
http://www.jadever.com  
E-mail:xmjadever@jadever.com.cn

Jadever Weightech, Inc.  
Tel:1-905-482-2618  
Fax:1-905-887-4066  
http://www.jadeverscale.com  
E-mail:james@jadeverscale.com



مؤسسة الشاوي التجارية  
ALSHAWI TRADING

Alshawi Trading

Block 351, Road 51, Bldg 20, Manama - Bahrain.  
www.alshawitrading.com  
info@alshawitrading.com  
P.O. Box: 33526

Telephone (973) 1755 0019  
Fax (973) 1755 5108