JIF-15B Weighing Indicator

Features

- Industrial grade design for tough industrial environments
- Noise and interference protection. Efficiently block the interference of power, microwave
- Standard equipment: Independent RS 232 Current Loop&Data Clock Output interface
- 5 stages of linear calibration, providing higher system accuracy
- 24 bits Internal A/D resolution reaches 24 bits
- Highly stabilized A/D sampling data
- Equipped with Self-Dialogist function, convenient for on-site maintenance

Specifications

Model	JIF-15B
Built-in Interface	RS 232 & Current Loop & Data Clock Output
Display	Weight display 7 digits, 7 segments 0.8'' high red LED
Status Indicators	3 ϕ LED, Stable, Zero, Net, Gross, Tart
Min. Readability	×1 , ×2 , ×5 , ×10 , ×20 , ×50
Load cell excitation	DC 5V±5% , 120mA (up to 8 350Ω Load Cells)
Memory	Calibration parameters and function settings are saved into EEPROM
Input sensitivity	0.15 μ V/D and up 1/60000 d
Max. measured voltage	-1mV - 39mV
A/D Conversion/rate	△Σ / 80 times/sec.

Sizedraft

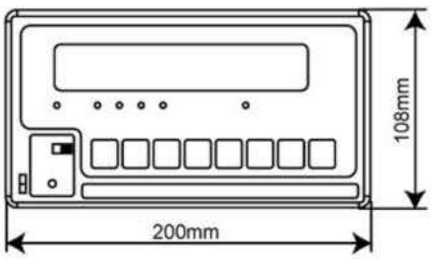

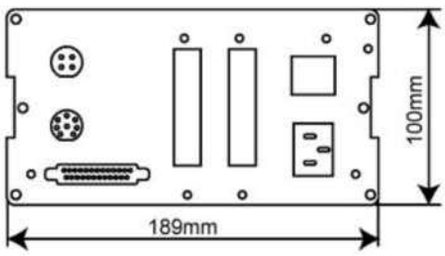

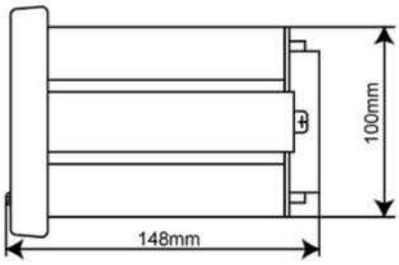

JADEVER®

Jadever Scale Co., Ltd.
Tel : 886-2-22990203
Fax : 886-2-22990204
http: www.jadever.com
E-mail:sales@jadever.com.tw

Xiamen Jadever Scale Co., Ltd.
Tel : 86-592-6037668
Fax : 86-592-6037028
http://www.jadever.com
E-mail:xmjadever@jadever.com.cn

Jadever Weightech, Inc.
Tel:1-905-482-2618
Fax:1-905-887-4066
http://www.jadeverscale.com
E-mail:james@jadeverscale.com

SHAWI
مؤسسة الشاوي التجارية
ALSHAWI TRADING

Alshawi Trading

Block 351, Road 51, Bldg 20, Manama - Bahrain.
www.alshawitrading.com
info@alshawitrading.com
P.O. Box: 33526

Telephone (973) 1755 0019
Fax (973) 1755 5108