



Superior Air Line Lubricant

- *Quality formulated specially for air lines – withstands extreme punishment.*
- *Special emulsifying additives enable water to mix readily with oil.*
- *Bonds tenaciously to working surfaces for long-lasting protection.*

TRUST *Save Money*
OMEGA *Enhance Performance*
TO *Extend Service Life*



TW
PERFORMANCE
POLYMERS & FLUIDS®

KOREA

OMEGA ULTIMATE LUBRICANTS

SPECIAL FEATURES

Omega 605 Superior Air Line Lubricant is the scientifically advanced formulation that provides exceptional safety in all air line applications.

- **Omega 605** is quality formulated specially for air lines – withstands extreme punishment.
- **Omega 605** has special emulsifying additives to enable water to mix readily with oil – keeps lines flowing freely.
- **Omega 605** bonds tenaciously to working surfaces – gives reliable, long-lasting protection.

OUTSTANDING PROPERTIES

Omega 605 is the superior air line lubricant that:


- Is made from the finest base oils available – blended with unique Omega "Megalite" supplements to ensure unmatched lubricity.
- Contains special foam inhibitors to reduce pressure on seals and boost overall performance.
- Gives excellent film strength to resist the highest pressure encountered in most air line applications.
- Provides outstanding temperature stability.

USE FOR

Omega 605 is a super steady lubricant for air lines made from quality base oils and fortified with exclusive Omega supplements for unmatched performance.

While **Omega 605** is especially developed for air line performance and meets or exceeds virtually all manufacturers' specifications, it is also ideally suited to pneumatic tool application.

Use **Omega 605** for all air line lubricator applications.

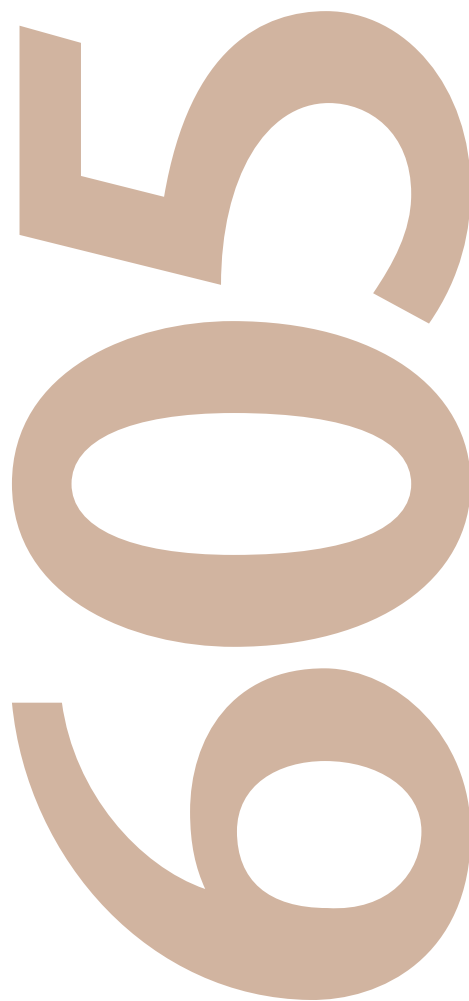

Omega

The Ultimate Lubricant

ITW PPFK reserves the right to modify or change this product for purposes of improving its performance characteristics.
© 2016 ITW PP & F Korea Limited

The Omega Trade Mark is the property of ITW Inc., and is used under licence by ITW PP & F Korea Limited.



The information contained in this publication is to the best of our knowledge and accurate at the time of issue in October, 2016



The Ultimate Lubricant

605

DESCRIPTION:

Omega 605 is an air-line lubricant incorporating exceptional safety. It is made from the finest base oils available and blended with exclusive Omega supplements.

VERSATILITY:

While Omega 605 is specifically developed for air-line performance, and exceeds or meets all specifications therefor, it is also ideally suited to pneumatic air-tool lubrication.

PROBLEM-SOLVING LUBRICANT:

Air-line lubrication has always posed severe performance problems as well as safety hazards. Ordinary oils currently being used for air-line lubrication often 'curdle' with water and form hard blockages at the connection stages. Omega 605 however, emulsifies immediately, forming a surface preservation barrier that flows freely at all times without any sectional or connection stage build-up.

FOAM INHIBITED:

Omega 605 is heavily fortified with Omega's exclusive supplements designed to resist aeration. Ordinary oils have a marked tendency to foam. Foam is part oxygen and therefore causes oxidation. Oxidation is the forerunner of cancerous, internal equipment corrosion.

TYPICAL DATA:

TEST	ASTM TEST METHOD	TEST RESULT
		SAE 10
ISO Viscosity Grade	D-2422	32
Appearance	Visual	Clear to pale yellow
Density, Kg/L @ 15°C	D-1298	0.867
Viscosity, cSt @ 40°C	D-445	32.9
Viscosity, cSt @ 100°C	D-445	5.8
Viscosity Index	D-2270	106
Flash Point, COC, °C	D-92	215
Pour Point, °C	D-97	-21
Aniline Point, °C	D-611	116
Foaming Characteristics -		
All Sequences, After Settling	D-892	Nil
Rust-Preventing Characteristics	D-665	Pass

The characteristics given above are typical of current production only and slight batch to batch variations should be expected.

STABILITY:

At low temperatures, ordinary oils become thick and sluggish, while high temperatures make them thin and ineffective. Omega 605 contains special active synergists that prevent viscosity alterations and promote texture consistency, regardless of fluctuating climatic or equipment operating temperatures.