



636

OMEGA 636 Jamaican-Base Universal Maintenance Oil



Jamaican- Base Universal Maintenance Oil

- *Made with pure Jamaican pimento oil for enduring quality.*
- *Four-in-one action – lubricates, penetrates, lifts water & prevents rust.*
- *Unbelievable versatility – can be used as temporary corrosion protection before applying anti-corrosion coating.*

TRUST Save Money
OMEGA Enhance Performance
TO Extend Service Life



TW
PERFORMANCE
POLYMERS & FLUIDS®



OMEGA ULTIMATE LUBRICANTS

SPECIAL FEATURES

Omega 636 Jamaican-Base Universal Maintenance Oil is "The Liquid Wrench" universal maintenance oil with superior water resistance and displacement properties.

- **Omega 636** is made with pure Jamaican pimento oil for enduring quality.
- **Omega 636** has four-in-one action – lubricates, penetrates, lifts water and prevents rust.
- **Omega 636** is unbelievably versatile – can be used as temporary corrosion protection before applying permanent anti-corrosion coating (excluding paints or primers).

OUTSTANDING PROPERTIES

Omega 636 is the Jamaican-base universal maintenance oil that:

- Is formulated with an oil heavier than water – displaces water rapidly with deep penetrating action that forces moisture/water out.
- Frees rust-frozen parts in seconds – even "impossible" jobs.
- Clings tenaciously to metal parts for superior lubrications and surface protection.
- Is easily applied with a brush, roller, air-spraying or soaking in bath – requires no mixing or special surface preparation.


USE FOR

Omega 636 offers an unprecedented standard of protection for metal surfaces against corrosion caused by oxidation.

Omega 636 not only penetrates metal surfaces, but also leaves a thin protective surface film that resists oxidation, rust and corrosion.

Omega 636 can be used on all medium and small machinery and equipment as a rust inhibitor, fingerprint and perspiration suppressant and active water displacer.

Use **Omega 636** for freeing rust-frozen parts like bolts, screws and nuts; protecting small parts and tools; waterproofing "outdoor-exposed" parts and equipment; rust-proofing and preserving parts prior to storage and transport; protecting newly machined ferrous alloys; and general purpose lubrication and rust-protection.

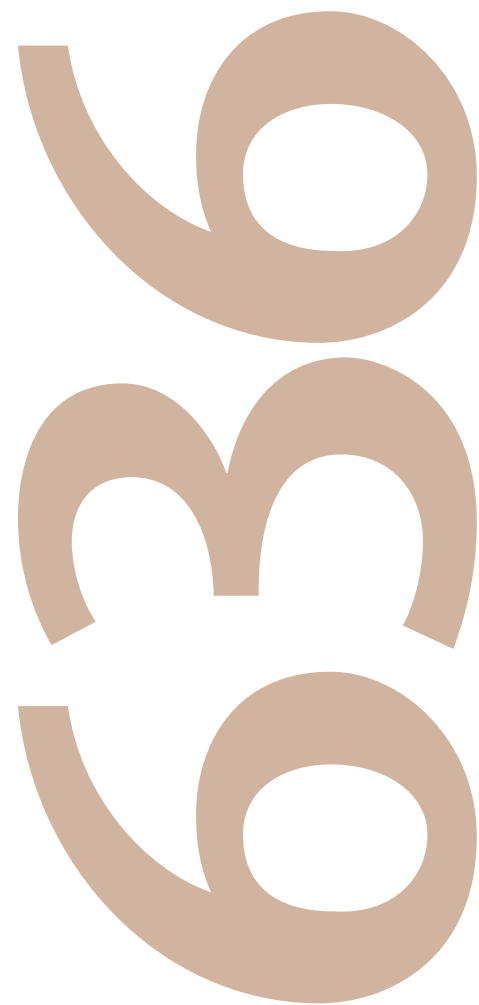

Omega

The Ultimate Lubricant

ITW PPFK reserves the right to modify or change this product for purposes of improving its performance characteristics.
© 2016 ITW PP & F Korea Limited

The Omega Trade Mark is the property of ITW Inc., and is used under licence by ITW PP & F Korea Limited.



The information contained in this publication is to the best of our knowledge and accurate at the time of issue in October, 2016

DESCRIPTION:

Omega 636 is a universal, multi-purpose lubricant designed for maximum surface penetration power, superior water displacement capability and engineered for a wide variety of applications in the workshop for maintenance.

SURFACE PROTECTION:

Omega 636 offers an unprecedented standard of protection for metal surfaces against corrosion caused by oxidation. Not only does this product penetrate the metal surface, it also leaves a thin protective surface film that resists oxidation, rust and corrosion.

RUST PROTECTION:

Omega 636 is so versatile that can be used as a rust protection before applying other heavy-duty anti-corrosion coatings or treatments (excluding paints or primers, since Omega 636's oiliness will affect surface adhesion).

LONG LASTING:

Unlike ordinary penetrating oils and water displacers that easily become unstable, Omega 636 retains its stability through specially-formulated thermally stable additives that ensure long-lasting protection.

UNYIELDING LUBRICITY:

Omega 636's viscous lubricating film greatly reduces friction, heat and wear. Pressure-activated EP additives effortlessly overcome lubricating emergencies such as when sudden and/or excessive pressure threatens to rupture the lubricating film to cause disastrous metal-to-metal contact.

TYPICAL DATA:

TEST	ASTM TEST METHOD	TEST RESULT
Appearance	Visual	Transparent Green
Density, Kg/L @ 15°C	D-1298	0.843
Viscosity, cSt @ 40°C	D-445	6-8
Flash Point, COC, °C(°F)	D-92	67(152.6)
Pour Point, °C (°F)	D-97	-17(1.4)
Film Thickness @25°C(76°F)	Proprietary	0.2 mil
Coverage @25°C (76°F) sq. ft/U.S. gallon	Proprietary	3000
Water Displacement Characteristics	Proprietary	Pass
Rust-Preventing Characteristics -		
Cast Iron Chips, RH100%, 72 hrs.	Proprietary	Pass

The characteristics given above are typical of current production only and slight batch to batch variations should be expected.

APPLICATION:

Omega 636 can be used in all medium to small size machinery and equipment as a rust inhibitor, surface protector, fingerprint and perspiration suppressant and active water displacer. It can also be used as a light-duty lubricant during deep penetration applications. Unlike cheap kerosene/light oil products that easily wash off, Omega 636 stubbornly adheres. Apply in a sprayer, as a drip, with a brush or as a dip.