



Superior Chain Lubricant

- *Dramatically improves chain life for immediate cost saving.*
- *Remains stable through variation & cycles in operating temperatures.*
- *Special micronized "Megalite" structure – ensures lubricant stays in place.*

TRUST Save Money
OMEGA Enhance Performance
TO Extend Service Life



TW
PERFORMANCE
POLYMERS & FLUIDS®

KOREA

SPECIAL FEATURES

Omega 646 Superior Chain Lubricant is a fluid lubricant quality engineered exclusively for use on all types of chains.

- **Omega 646** dramatically improves chain life for immediate cost saving.
- **Omega 646** remains stable through wide variation and cycles in operating temperatures.
- **Omega 646's** special micronized "Megalite" structure ensures the lubricant stays in place to help eliminate galling, seizing and scoring of chains.

OUTSTANDING PROPERTIES

Omega 646 is the superior chain lubricant that:

- Contains Omega's unique "Megalite" supplement to coat and protect metal surfaces and minimize metal-to-metal contact – arrests chain chatter and stick-slips.
- Endures high load-carrying capability due to unique plating effect of special additives that lubricate even in the absence of any hydrodynamic lubricant film.
- Provides super temperature stability – up to 750°F (400°C).
- Fills out the "peaks and valleys" of newly installed parts and promotes plastic deformation to assist machinery break-in and provide better long-term performance and parts life.


USE FOR

Omega 646 is formulated from the ground up with expensive, high-performance constituents. The base suspension lubricant is a high-quality, refined paraffinic which displays superior lubrication action and anti-oxidation qualities in severe conditions.

Omega 646's specialized micronized solid lubricant, or "moly", keeps lubricating up to an approximate limit of 750°F (400°C).

Use **Omega 646** for chains of all types, including:

- Gear Drives • Conveyers • Pulleys • Wire Ropes
- And virtually any high pressure/temperature application such as in dryers and stenters.

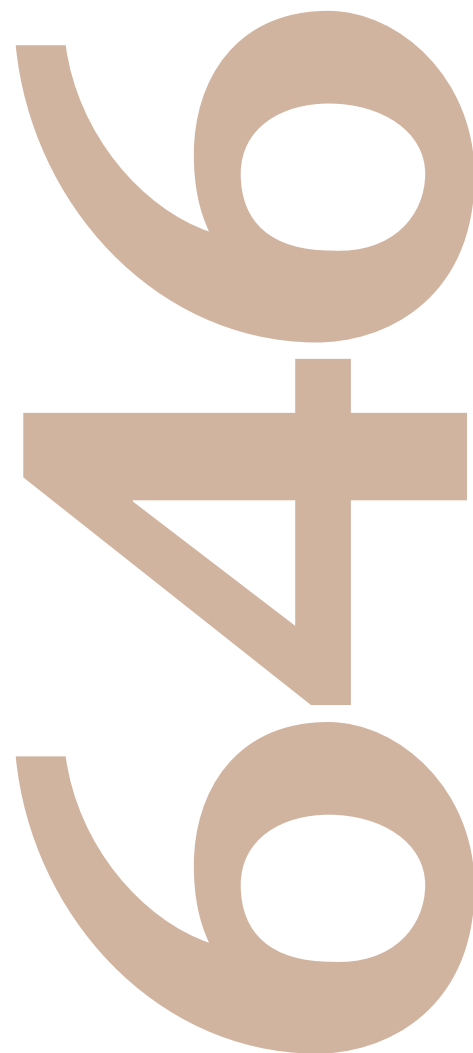

Omega

The Ultimate Lubricant

ITW PPFK reserves the right to modify or change this product for purposes of improving its performance characteristics.
© 2016 ITW PP & F Korea Limited

The Omega Trade Mark is the property of ITW Inc., and is used under licence by ITW PP & F Korea Limited.



The information contained in this publication is to the best of our knowledge and accurate at the time of issue in October, 2016



The Ultimate Lubricant

646

DESCRIPTION:

Omega 646 is a fluid lubricant engineered exclusively for chains. It employs the high technology originally derived from the space age in which a super micronized solid lubricant – moly – is used to complement a high-grade, refined paraffinic oil in the lubrication of chains.

MULTITUDE OF MAINTENANCE

USES:

Omega 646 Fluid Lubricant for Chains is versatile. It promotes chain and parts life.

PREVENTS METAL-TO-METAL

CONTACT:

Omega 646 absolutely prevents any metal-to-metal contact in the absence of hydrodynamic film. Under load, the micronized platelets present in Omega 646's moly, slide easily upon one another to prevent metal contact. No other conventional lubricant can do so. Omega 646's specialized moly will keep lubricating up to an approximately limit of 750°F (400°C). Therefore Omega 646 can be used in the most demanding, tough and high temperature chains without breakdown or deterioration.

CHAIN LUBRICATION PROBLEMS:

Conventional chain oils and greases lubricate by separating the load surfaces with a hydrodynamic film. This film cannot always be achieved in actual "in use" situations. Formation of this film is a function of many variables such as lubricant viscosity, surface speed and applied load. When speeds are too low, loads are too high, or there is an improper match of lubricant to viscosity to speed and load; and a plethora of other variables, metal-to-metal contact occurs to increase friction and subsequent excessive wear.

These conditions are not uncommon. They exist in normal operation such as during machinery start up, shutdown, during running-in of a replaced part and all through the operation of many heavily-loaded, slow-moving parts prevalent in chain driven machinery. A phenomena known as "chatter" or "stick slip" occurs and there is no lubrication between the chain and gear wheels!

RUNNING IN:

Every new metal surface under a microscope is actually a series of valleys and peaks. When two such surfaces come into contact, only the peaks meet. Therefore these very small areas bear the entire load. These peaks "cold weld" together, then shear apart when movement occurs. Omega 646 -when applied to new parts before operating -can prevent actual contact between the peaks and prevent galling, scoring and catastrophic parts failure.

The moly in Omega 646 permits the surfaces to conform to each other by plastic deformation rather than potentially destructive welding and shearing. Omega 646 permits optimum run-in lubrication for new machine parts.

SLOW-MOVING PARTS:

Ordinary lubricants fail to achieve a hydrodynamic film between slow moving parts under high load. Omega 646 will separate such surfaces even at rest and its low coefficient of friction prevents chatter and stick-slip operation.

PREVENTING FRETTING CORROSION:

In limited motion machinery, vibration prevents the forming of hydro-dynamic lubricant film between parts. Conventional lubricants literally vibrate off or migrate away. Omega 646's moly remains in place, reducing metal-to-metal contact and fretting corrosion.

ANTI-FRICTION BEARINGS:

When bearings overheat, ordinary grease components thin out excessively. Omega 646's moly will continue to protect such surfaces.

SUPERIOR FOR CHAIN LUBRICATION

Omega 646 is formulated from the ground up with expensive, high-performance constituents. The base suspension lubricant is a high quality, refined paraffinic which displays superior lubrication action and anti-oxidation qualities.

Special viscosity improvers give Omega 646 a stability to temperature fluctuations for lubrication superior to all conventional chain lubricants. It will markedly improve chain lubricity and lower drag on all machinery components dramatically to save operating costs.

APPLICATION:

Omega 646 can be applied directly onto chains and machine parts by either dipping, using a brush or bath or by drip feed. Any fling-off that may be encountered in certain high-speed chains immediately after application can be ignored as the moly in Omega 646 will hold tenaciously onto the applied surfaces where lubrication is most critical. Omega 646 is used for superior lubrication of all types of chains -conveyors, gear drives, pulleys, etc. and will withstand the punishing high temperature conditions found in dryers and stenters.

TYPICAL DATA:

TEST	ASTM TEST METHOD	TEST RESULT		
		SAE 40	SAE 50	SAE 90
ISO Viscosity Grade	D-2422	68	150	220
Appearance	Visual	Black Opaque, Tacky		
Density, Kg/L @ 15°C	D-1298	0.875	0.890	0.893
Viscosity, cSt @ 40°C	D-445	76	150	220
Viscosity, cSt @ 100°C	D-445	14.0	19.1	21.3
Viscosity Index	D-2270	191	183	115
Flash Point, COC, °C(°F)	D-92	204(399)	218(424)	264(507)
Pour Point °C(°F)	D-97	-30(-22)	-25(-13)	-22(-8)
Total Base Number, mg KOH/g	D-2896	11.6	11.6	8.2
Foaming Characteristics -				
All Sequences, After Settling	D-892	Nil	Nil	Nil
Rust-Preventing Characteristics, 48 hours saltwater	D-665	Pass	Pass	Pass
Molybdenum Disulphide, % Mass*	Gravimetric	1.0	1.0	1.0

* MoS₂ contribution 0.9

The characteristics given above are typical of current production only and slight batch to batch variations should be expected.