


699

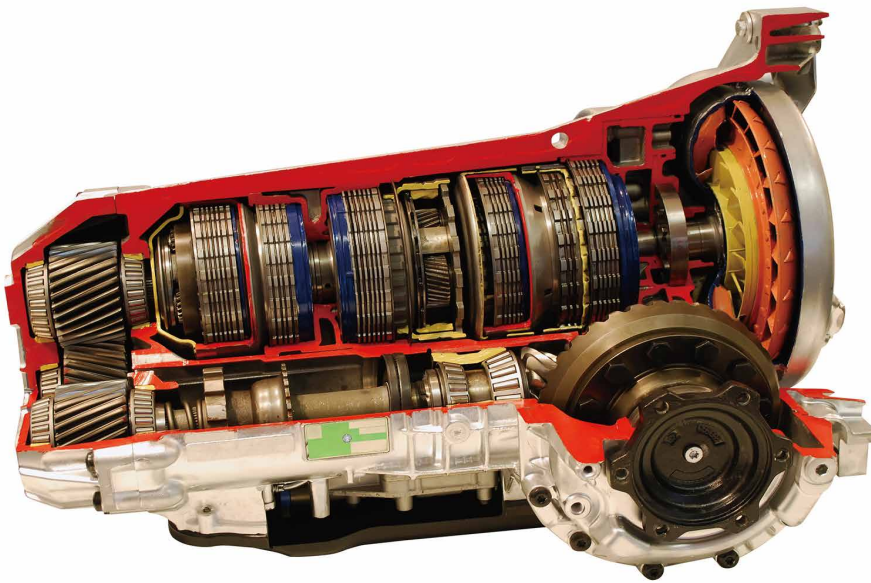

- *New Synthetic Formulation to Satisfy the Most Stringent Requirements of All Major Vehicle Manufacturers*
- *Unique & Expert-Balanced Additive Package Offers Excellent Resistance to Foam, Corrosion, Wear, Heat and Oxidation – Up to 120,000 km!*
- *Eliminates Problems like Sludge Drag, Gum Scouring and Varnish Deviation*

Super Automatic Transmission Fluid

TRUST *Save Money*
OMEGA *Enhance Performance*
TO *Extend Service Life*



TW
PERFORMANCE
POLYMERS & FLUIDS®

KOREA

SPECIAL FEATURES

The New OMEGA 699 Super Automatic Transmission

Fluid is a truly multi-purpose fluid that meets and exceeds all major original equipment manufacturers' specifications for automatic transmission fluids.

- **OMEGA 699** is enhanced with a more versatile formulation to lubricate the newest designs in automatic transmissions
- **OMEGA 699** keeps equipment cool and lubricated, absorbs heat and converts it to free energy – ensuring the best protection
- **OMEGA 699** ensures that the AT system, clutch plates and the seals remain clean and highly functional at all times

OUTSTANDING PROPERTIES

Formulated with superior quality synthetic fluid and professionally-balanced additive package, **OMEGA 699**:

- Has built-in heat resistance up to 176°C
- Provides an essential safety margin – prevents equipment malfunction and also promotes long-term safety
- Can be used up to 120,000 km without renewal
- Offers high viscosity & temperature stability – suitable for all climates
- Is completely oxidation-resistant, & complemented with a unique friction-modifying additive
- Prevents corrosion, rust and the formation of surface scale

USE FOR

OMEGA 699 meets & exceeds:

- GM Dexron III G / III H
- GMC Truck & Coach Division vehicles using V, V-H & Super V transmissions
- Ford MERCON®
- Caterpillar TO-2 AV
- Mercedes Benz ZF 4HP20, MB 236.1; 2; 3(PSF); 5(C-4); 6; 7; 8; 9; 10
- Nissan / Infiniti Matic D / J / K
- Peugeot ZF 4HP20 / Porsche ZF 5HP19FL
- Toyota / Lexus / Scion Type T, T-II, T-III, T-IV
- Volvo
- ZF TE-ML 09/11, ZF TE-ML 03D, 04D, 09, 14, 16L, 17C
- Allison C-4
- Allison AT, MT & HT Transmissions & Sundstrand & Eaton heavy duty transmission
- Low temperature hydraulic and rotary air compressors
- And many others



Omega

The Ultimate Lubricant

ITW PPFK reserves the right to modify or change this product for purposes of improving its performance characteristics.
© 2016 ITW PP & F Korea Limited

The Omega Trade Mark is the property of ITW Inc., and is used under licence by ITW PP & F Korea Limited.



The information contained in this publication is to the best of our knowledge and accurate at the time of issue in October, 2016



The Ultimate Lubricant

699

DESCRIPTION:

Enhanced with a more advanced formulation, the new OMEGA 699 is designed to satisfy the requirements of all major vehicles manufacturers. It is a blend of premium quality synthetic base oils and a specifically balanced additive package. The new OMEGA 699 offers high oxidation stability, excellent foam resistance, improved corrosion and wear protection, and outstanding heat resistance.

To provide smooth lock-up of clutches without chatter, the complex fluid is also compounded



with a unique friction-modifying additive. The new synthetic OMEGA 699 is a truly multi-purpose fluid that meets and exceeds most original equipment manufacturers' specifications for automatic transmission fluid.

THERMAL STABILITY:

OMEGA 699 has a built-in heat resistance up to 176°C. This provides the essential safety margin that prevents equipment malfunction and also promotes long-term safety.



POWER TRANSMISSION:

OMEGA 699 not only performs as the transmitting hydraulic medium, but also keeps equipment cool and lubricated. This ability to absorb heat and convert it to free energy is a unique characteristic and benefit of OMEGA 699. This energy conversion takes place only above 176°C. During the dissipation of heat energy, the molecular structure remains constant and unchanged. The pressure transference is then carried through with minimal energy consumption.



PREVENTS SLUDGE FORMATION:

OMEGA 699 is a synthetic high-purity fluid. It does not contain the heavy waxes of Naphthenics or Asphaltics and therefore will not form heavy sludges and carbon solids. This ensures that the system, the clutch plates and the seals remain clean and functional at all times. Problems such as sludge drag, gum scouring and varnish deviation are all eliminated.



INCREASED USAGE:

Whereas the ordinary fluid currently used for power transmission needs to be changed on a regular basis, OMEGA 699 can be used up to 120,000 km (One Hundred & Twenty Thousand Kilometers) without renewal.

OXIDATION RESISTANCE:

OMEGA 699 is completely oxidation-resistant. It prevents corrosion, rust and the formation of surface scale.

CLIMATICALLY STABLE:

OMEGA 699 is as efficient in winter as it is in summer. Its high viscosity index provides the temperature stability that is essential for superior automatic transmission operation.

RECOMMENDED APPLICATIONS:

OMEGA 699 is suitable for use where the following performance specifications are required:

- ✓ Allison C3, C4 TES 228 & TES 295
- ✓ Aisin Warner A-1, 3309
- ✓ Audi ZF, 5HP19FL, 5HP24A, LT7114 & Audi/VW G-052-162-A1, G-052-162-A2, G-055-005-A2
- ✓ BMW ZF, 5HP18FL, 5HP24, 5HP30, LT 71141
- ✓ Caterpillar Cat TO-2
- ✓ Chrysler & American Motors ATF +3 / ATF +4
- ✓ Daewoo LT71141
- ✓ Fiat - all vehicles
- ✓ Ford M, MV, FNR5 (for Mazda), M2C138-CJ, M2C166H, MC2C924-A
- ✓ GM DII / II-E / III / IIIG / IIH, GM 9986195
- ✓ Hyundai / Kia SP-II, SP-III, SP-IV
- ✓ Honda ATF – Z1, DW-1 (except in CVTs)
- ✓ Isuzu - all vehicles
- ✓ Jatco 3100PL085
- ✓ JASO 1A (M315-2006)
- ✓ Jaguar M1375.4, ATF 3403 M115 / Jeep (ATF + 3, ATF + 4) & JWS 3309
- ✓ Land Rover LRN402G
- ✓ Mazda ATF M-III, M-V
- ✓ Mini Cooper T-IV (except CVT)
- ✓ Mercedes ZF 4HP20, MB 236.1; 2; 3(PSF); 5(C-4); 6; 7; 8; 9; 10
- ✓ MOPAR AS68RC ATF
- ✓ Nissan / Infiniti Matic D / J / K
- ✓ Peugeot ZF 4HP20 / Porsche ZF 5HP19FL, ATF 3403-M115, T-IV
- ✓ Opel - all vehicles
- ✓ Renault - all vehicles
- ✓ Saab 3309
- ✓ Subaru ATF, ATF-HP
- ✓ Suzuki ATF 3317
- ✓ Toyota / Lexus / Scion Type T, T-II, T-III, T-IV (GM US PN 88900925), (GM Canada PN 22689186)
- ✓ Voith H55.6335.XX(G607), Turbo, ZF, Comat
- ✓ Volvo 97340, 1161521, 1161540, T-IV, STD 1273.41
- ✓ VW / Audi Part # G052 025(09M), G 052 990(09A), G 052025 A2
- ✓ ZF TE-ML 09/11, ZF TE-ML 03D,04D,09,14, ZF TE-ML 16L,17C

Note: Not recommended for vehicles where CVT fluids or Type F ATF are specified.

TYPICAL DATA:

TEST	ASTM TEST METHOD	TEST RESULT
ISO Viscosity Grade	D-2422	32
Color	Visual	Red
Gravity, API	D-287	35.3
Specific Gravity @ 15°C	D-1298	0.848
Viscosity @ 40°C, cSt Kinematic	D-445	35.5
Viscosity @ 100°C, cSt Kinematic	D-445	7.3
Viscosity @ -40°C, cSt Kinematic	D-2983	16,000
Viscosity Index	D-2270	169
Pour Point, °C	D-97	-40

The characteristics given above are typical of current production only and slight batch to batch variations should be expected.