




EP Bearing & Chassis Grease

- *Super all-purpose lubricant for extreme-pressure & high-impact conditions.*
- *Withstands shock – resists squeeze-out and thinning.*
- *Quality engineered to last longer – saves time & money!*

TRUST OMEGA TO *Save Money
Enhance Performance
Extend Service Life*

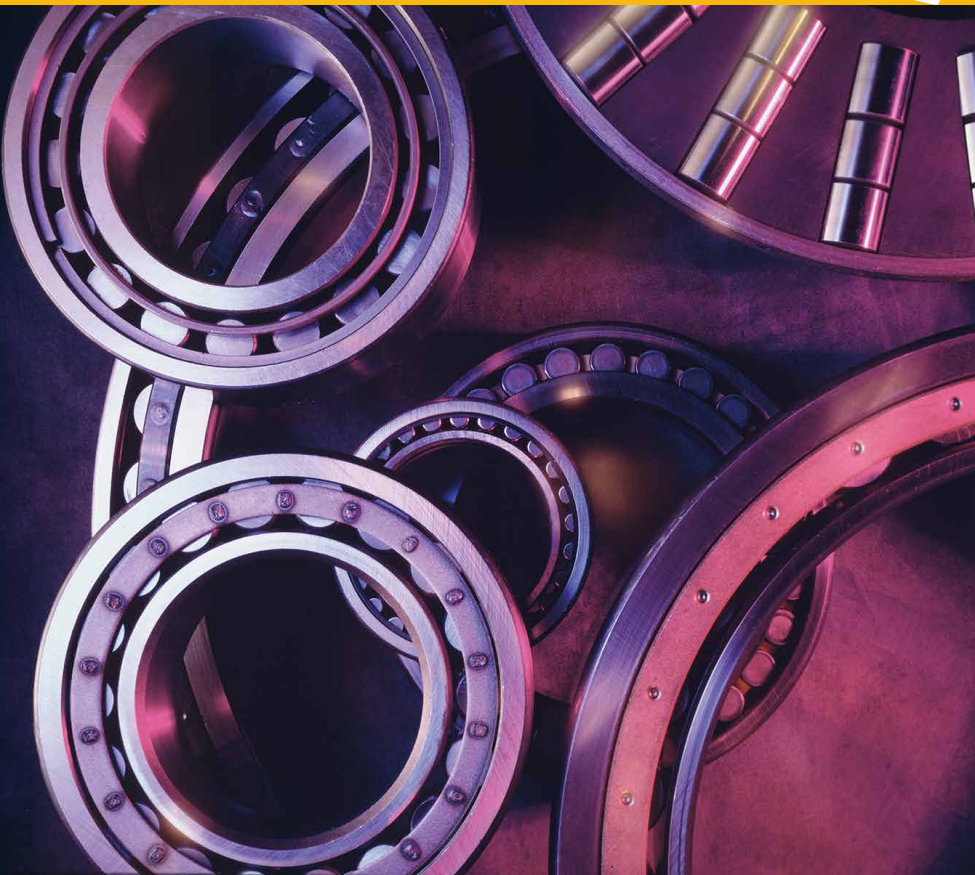

TW
PERFORMANCE
POLYMERS & FLUIDS®

KOREA

SPECIAL FEATURES

Omega 77 EP Bearing & Chassis Grease is the super sophisticated chassis and bearing grease with truly "All-Purpose" versatility.

- **Omega 77** is ideal for extreme-pressure and high-impact conditions where ordinary greases fail.
- **Omega 77** withstands shock – resists squeeze-out and thinning to stay in place.
- **Omega 77** is quality engineered for extended service life – lasts longer to save you time and money!

OUTSTANDING PROPERTIES

Omega 77 is EP (extreme pressure) bearing and chassis grease that:

- Is confidently recommended for high-speed, high-powered equipment.
- Resists water, acids and air-borne contaminants – forms its own protective seal to prevent rust and oxidation.
- Provides superior lubricity that significantly reduces energy requirements.

USE FOR

Omega 77 provides an exceptional standard of lubrication for the endless variety of mechanical equipment in use today.

Use **Omega 77** for:

• High-Speed Bearings • Vehicle Chassis • Wheel Bearings • Slideways and Sleeves • Guides & Tracks • Railway Equipment and Rolling Stock.

Omega 77 is the right lubricant for these metals and combination of metals:

• Aluminum • Cast Iron • Nickel • Antimony • Indium • Silver • Bismuth • Iron • Steel • Tin • Cadmium • Lead • Zinc.



Omega

The Ultimate Lubricant

ITW PPFK reserves the right to modify or change this product for purposes of improving its performance characteristics.
© 2016 ITW PP & F Korea Limited

The Omega Trade Mark is the property of ITW Inc., and is used under licence by ITW PP & F Korea Limited.



The information contained in this publication is to the best of our knowledge and accurate at the time of issue in October, 2016

DESCRIPTION:

Omega 77 is a sophisticated, impact-resistant, chassis and bearing lubricant incorporated with the unique Omega "Megalite" to ensure longer service life. It provides an exceptional standard of lubrication to the endless variety of mechanical equipment in use today. This results in dramatically reduced inventories, downtime and maintenance cost.

COMFORMITY:

Omega 77 has constant conformity. This aspect provides the essential texture for precision applications and the necessary allowance for possible surface deformity in the bearing. This ensures that alignment remains constant.

FUNCTIONS:

Omega 77 resists squeeze-out and thinning. Bearings must provide the support and constraint to a moving link of kinematic chains or mechanisms. The prime objective is to retain complete lubricant coverage and yet still provide maximum mechanical freedom. Ordinary greases are unable to withstand the everyday pressures of bearings and, subsequently, disintegrate rapidly leaving prime support areas in direct, metal-to-metal contact!

LOW COEFFICIENT OF FRICTION:

Omega 77 provides excellent reduction of friction between journal and bearing. This results in considerably lower energy consumption and wear - especially during the critical start-up period.

LOW THERMAL EXPANSION:

Omega 77 does NOT expand or contract as a result of temperature or climatic changes. Ordinary greases not only expand, but often form small hard congeallants that rapidly transform into diamond hard abrasives. This causes heavy bearing drag which overloads equipment and increases the frictional energy requirements.

HIGH THERMAL CONDUCTIVITY AND ABSORPTION:

Omega 77 rapidly absorbs and dissipates heat. Frictional heat can have a marked effect on the running efficiency of the equipment. Ordinary greases tend to burn-up and this enables 'hot-spots' to form. These develop into irreparable wear areas.

COMPRESSIVE STRENGTH:

Omega 77 possesses almost infinite strength to support maximum loads without rupturing, disintegrating, crumbling or crushing. When subjected to compression, the unique Omega "Megalite" fortified in the lubricating film of Omega 77 serves as molecular bearings to keep frictional surfaces apart.

CAPILLARY TENDENCIES:

Omega 77 has active supplements that ensure total surface coverage.

CORROSION RESISTANCE:

Omega 77 is resistant to the acids formed by "mixed-greases" previously used in the equipment. Omega 77 is also resistant to acids formed by contaminants.

ELASTICITY:

Ordinary greases tend to lubricate only those areas where they can be applied. This results in large areas, without lubrication, being subjected to damaging contact and eventual seizure! Omega 77 has a spreading ability that ensures ALL potential wear areas are covered.

METAL TYPES:

Omega 77 is ideal for application to the following metals and combinations of metals:

Aluminium	Cast Iron	Nickel
Antimony	Indium	Silver
Bismuth	Iron	Steel
Cadmium	Lead	Tin
Zinc		

TYPICAL DATA:

TEST	ASTM TEST METHOD	TEST RESULT		
		NLGI#2.5	NLGI#2	NLGI#00
Color	-	Red Sparkle	Red Sparkle	Red
Worked Penetration, at 25°C	D.217	250-280	265-295	400-430
Mineral Oil Specification -				
Viscosity, cSt at 100°C	D.455	30	30	19.2
Viscosity, cSt at 40°C	D.455	455	455	314
Viscosity Index	D.2270	110	110	60
Flash point, °C (°F)	D.92	254(489)	232(450)	242(468)
Pour point, °C (°F)	D.97	-10(14)	-12(10)	-12(10)
Dropping Point, °C (°F)	D.2265	190(374)	188(370)	N.A.
Water Washout Characteristics	D.1264			
Grease Washout, % Loss		4.5	3	N.A.
Wheel Bearing Leakage, % Loss	D.1263	0.4	1.2	2.1
Oil Separation, % Loss	D.1742	2.0	3.0	N.A.
Oxidation Stability, lbs loss in 100 hrs	D.942	5 max.	5 max.	5 max.
Rust Prevention	D.1743	Pass	Pass	Pass
Roll Stability, Point Change	D.1831	N.A.	2.19	N.A.
Timken, OK Load, kg	D.2509	23	23	23
Temperature Range, °C(°F)	-	- 7 to 150 (20 to 302)	-7 to 149 (20 to 300)	-7 to 149 (20 to 300)

The characteristics given above are typical of current production only and slight batch to batch variations should be expected.